


CB/1 D Parking buffer

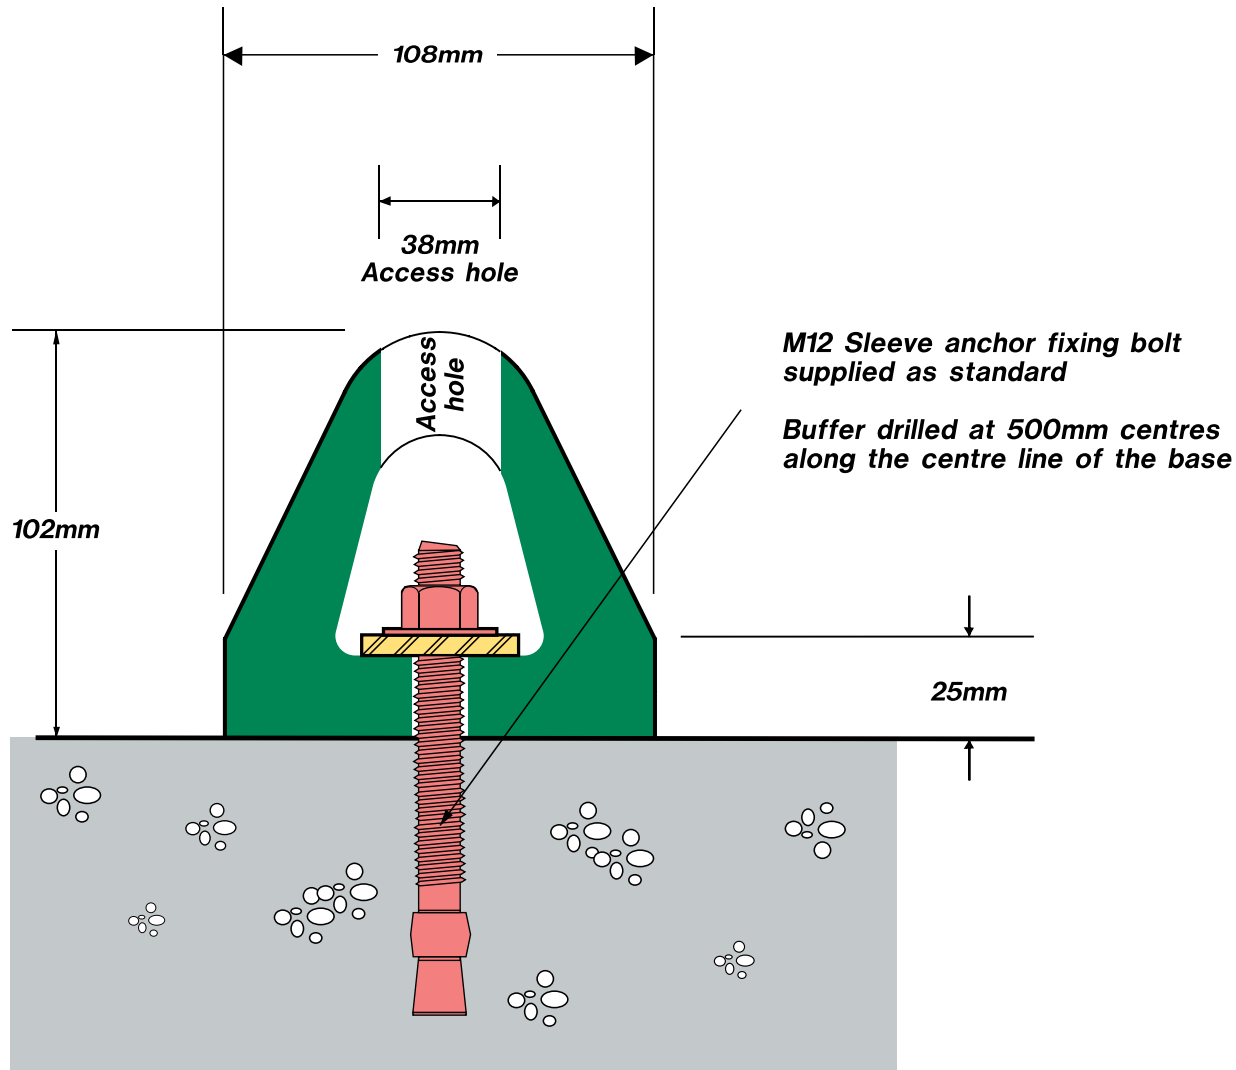

Hazard

Hazard
Brunel House
55/57 Bristol Road
Edgbaston
Birmingham
B5 7TU

Tel: 0121 446 4433
Fax: 0121 446 4230
Website: www.hazard.co.uk
email: sales@hazard.co.uk


EPDM Blend Rubber Specification

Test	Test Method	Limits
Tensile	BS903 A2	10.5 Mpa
Elongation	BS903 A2	300 % minimum
Hardness	BS903 A26	65 - 75 IRHD
Heat Ageing	7 days at 70 degrees C	
a) Tensile retention		90% minimum
b) Elongation retention		80% minimum
c) Hardness change		+7 IRHD
Compression set	BS903 A6A	30% maximum 22 hours at 70 degrees C
Tear resistance	BS903 A3 method c	40 N/mm minimum
Material	EPDM/SBR/Natural Rubber	+/- 10% unless Otherwise stated

EPDM/SBR/Natural rubber blend.
Filled with carbon black.
The material has resistance to ultra violet light,
ageing, sea water, fatigue and abrasion.
The rubber is of uniform quality and free
from foreign substances.

Standard colour black - customer colours on request

CB1/DD Parking buffer plate fix

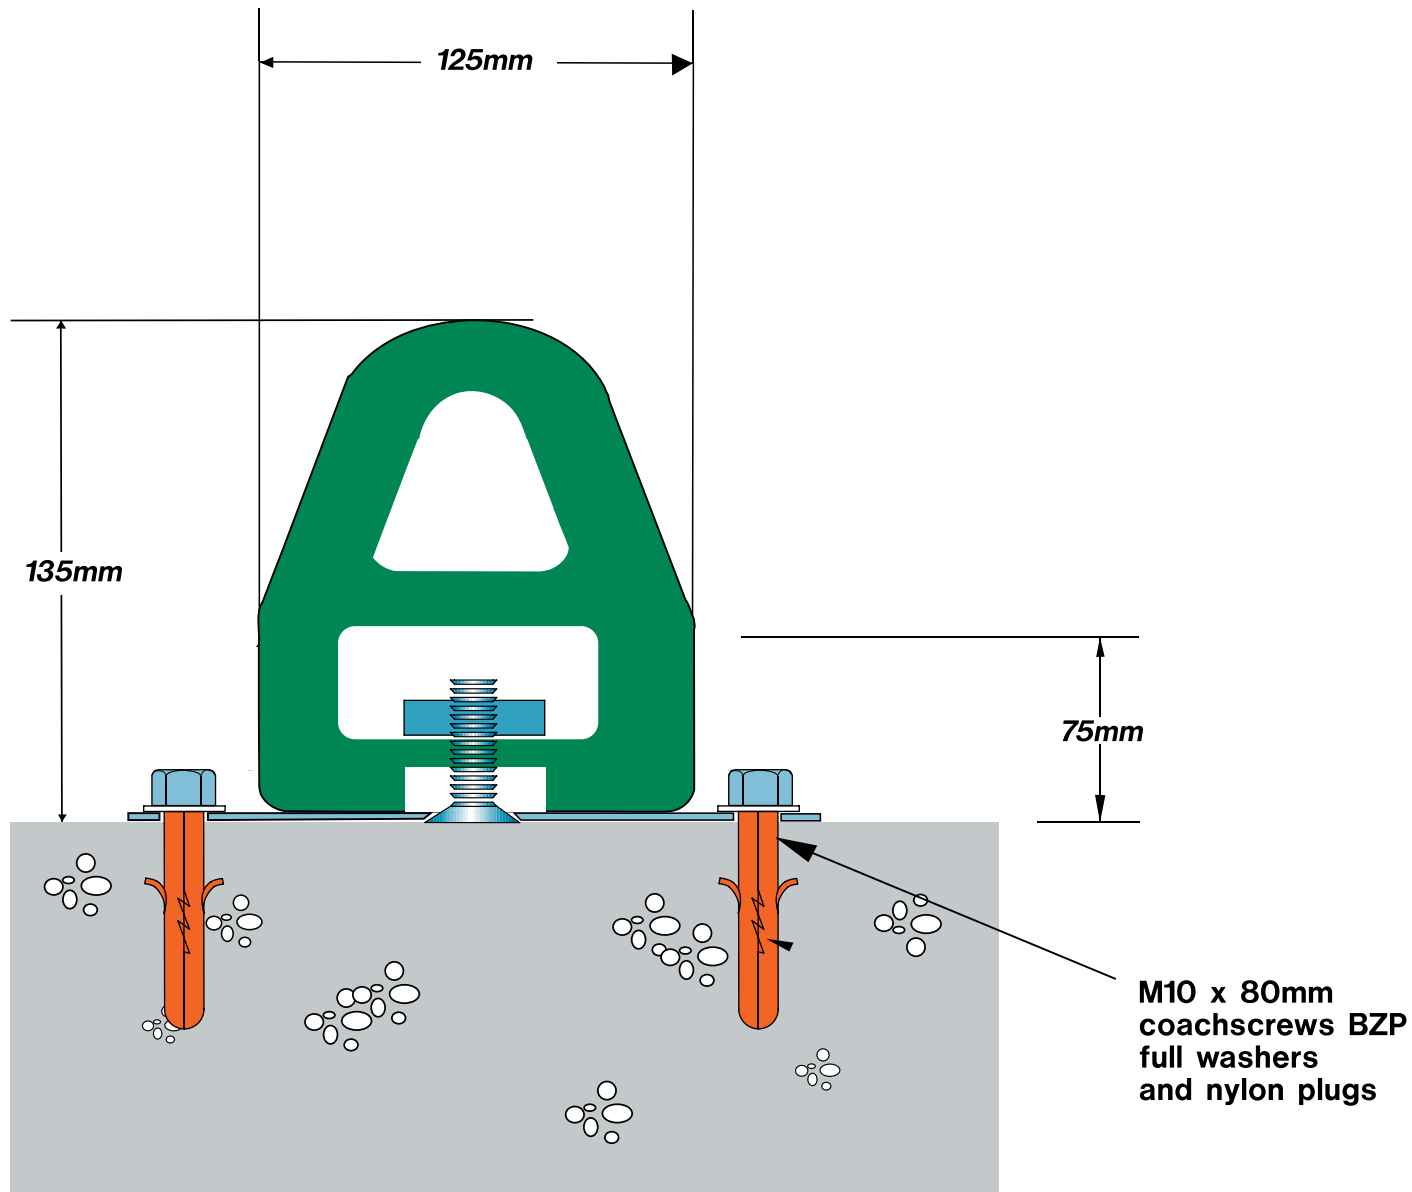

Hazard

Hazard
Brunel House
55/57 Bristol Road
Edgbaston
Birmingham
B5 7TU

Tel: 0121 446 4433
Fax: 0121 446 4230
Website: www.hazard.co.uk
email: sales@hazard.co.uk

EPDM Blend Rubber Specification

Test	Test Method	Limits
Tensile	BS903 A2	10.5 Mpa
Elongation	BS903 A2	300 % minimum
Hardness	BS903 A26	65 - 75 IRHD
Heat Ageing	7 days at 70 degrees C	
a) Tensile retention		90% minimum
b) Elongation retention		80% minimum
c) Hardness change		+7 IRHD
Compression set	BS903 A6A	30% maximum 22 hours at 70 degrees C
Tear resistance	BS903 A3 method c	40 N/mm minimum
Material	EPDM/SBR/Natural Rubber	+/- 10% unless Otherwise stated

EPDM/SBR/Natural rubber blend.
Filled with carbon black.
The material has resistance to ultra violet light, ageing, sea water, fatigue and abrasion.
The rubber is of uniform quality and free from foreign substances.

Standard colour black - customer colours on request