


LB/1 'D' rubber wall buffer

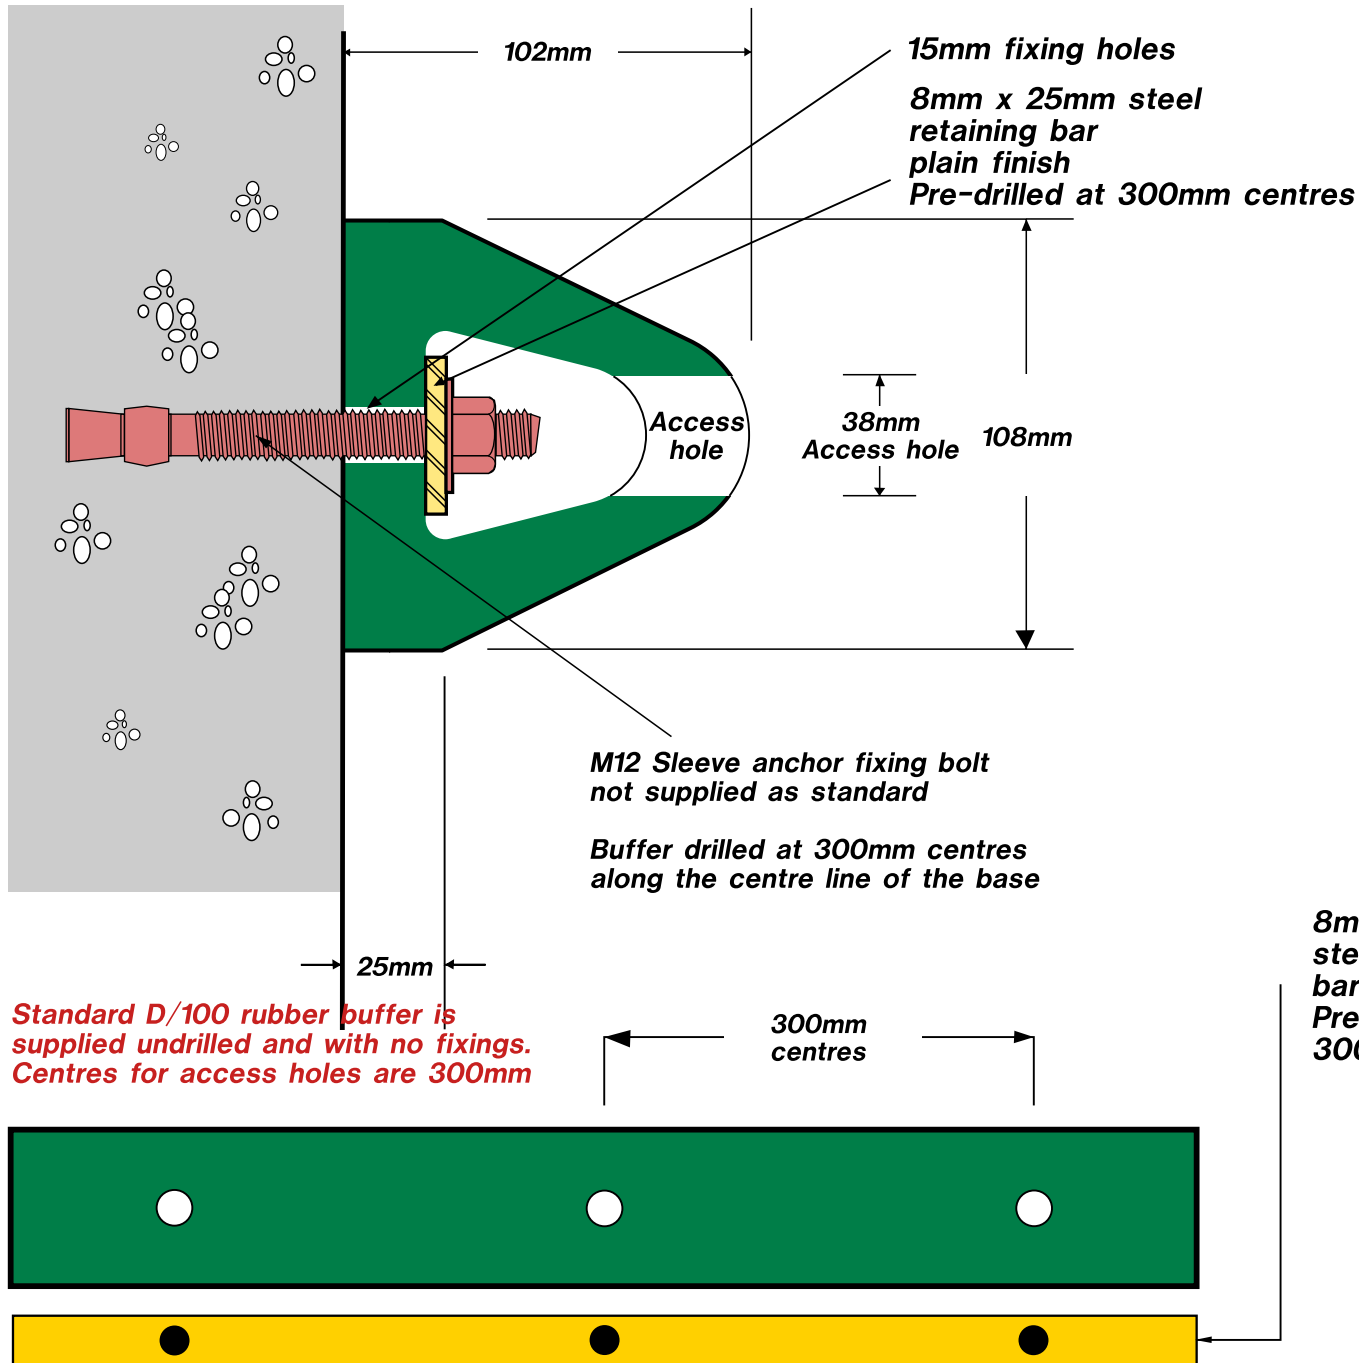

Standard colour black - customer colours on request

Hazard

Hazard
Brunel House
55/57 Bristol Road
Edgbaston
Birmingham
B5 7TU

Tel: 0121 446 4433
Fax: 0121 446 4230
Website: www.hazard.co.uk
email: sales@hazard.co.uk

EPDM Blend Rubber Specification

| Test | Test Method | Limits |
|-------------------------|--|---|
| Tensile | BS903 A2 | 10.5 Mpa |
| Elongation | BS903 A2 | 300 % minimum |
| Hardness | BS903 A26 | 65 - 75 IRHD |
| Heat Ageing | 7 days at 70 degrees C | |
| a) Tensile retention | | 90% minimum |
| b) Elongation retention | | 80% minimum |
| c) Hardness change | | +7 IRHD |
| Compression set | BS903 A6A | 30% maximum 22 hours at 70 degrees C |
| Tear resistance | BS903 A3 method c | 40 N/mm minimum |
| Material | EPDM/SBR/Natural Rubber +/- 10% unless Otherwise stated | |

EPDM/SBR/Natural rubber blend.
Filled with carbon black.
The material has resistance to ultra violet light,
ageing, sea water, fatigue and abrasion.
The rubber is of uniform quality and free
from foreign substances.